


| 未注公差/General tolerances (mm) | | | | | | | | | | 0.05/10 |
|------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|---------|
| 0 | >6 | >18 | >30 | >50 | >80 | >120 | >180 | >250 | <500 | |
| ~ 6 | ~ 18 | ~ 30 | ~ 50 | ~ 80 | ~ 120 | ~ 180 | ~ 250 | ~ 400 | | |
| ±0.10 | ±0.15 | ±0.20 | ±0.25 | ±0.30 | ±0.50 | ±0.80 | ±1.20 | ±1.50 | ±2.50 | |

| |
|--|
| 技术要求/Technical specification |
| 标准/Standard: EN 175301-803(formerly DIN 43650) |
| 接插孔位/Number of contacts: 2+PE |
| 额定电压/Rated voltage: DC 12V, 24V |
| 额定电流/Rated current: 10A |
| 插拔次数/Durability: ≥50 |
| 防护等级/Protection class: IP65 |

| 序号/No. | 描述/Description | 数量/Qty | 材质/Material | 备注/Notes |
|--------|-----------------------|--------|-----------------|----------------|
| 10 | 密封框/Profiled gasket | 1 | PVC | 黑色/Black |
| 9 | 平垫片/Flat gasket | 1 | PVC | 黑色/Black |
| 8 | 接线座/Internal core | 1 | PA | 黑色/Black |
| 7 | 接线柱/Contact | 3 | 铜/CuZn | 镀锡/Tin plate |
| 6 | LED+电阻/LED+Resistor | 1 | / | 红灯/Red |
| 5 | PG9螺母/PG9 cable gland | 1 | PP | 黑色/Black |
| 4 | 金属垫片/Grommet | 1 | 碳钢/Carbon steel | 镀锌/Zinc plate |
| 3 | O型圈/O-ring | 1 | PVC | 黑色/Black |
| 2 | 外壳/Housing | 1 | PC | 透明/Transparent |
| 1 | 安装螺钉/Fixing screw | 1 | 碳钢/Carbon steel | 镀锌/Zinc plate |

备注/Remarks: ☉, ☉ 选择其中一款装配。 / Select one of them (☉, ☉) to assemble.

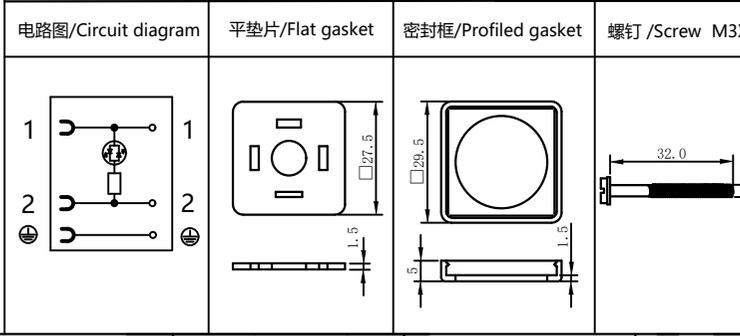

| | |
|---|--|
| THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO CIXI ZHONGTAI ELECTRIC APPLIANCE MANUFACTORY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | |
| CURRENT REV DESC: | 慈溪市中泰电器厂 CIXI ZHONGTAI ELECTRIC APPLIANCE MANUFACTORY |
| REVISION: A/0 | 2023/04/10 |
| DRWN: LU XD | 2023/04/10 |
| CHKD: CHEN YY | 2023/04/10 |
| APPR: CHEN G | 2023/04/10 |
| 产品描述/Description 电磁阀插头/SOLENOID VALVE CONNECTOR | |
| 产品编号/Comm.No. ZT-A-DC-PG9-T | 图纸编号/Drawing No. ZT-D-20230410/2 |
| DIMENSION UNITS mm | SCALE 1:1 |
| THIRD ANGLE PROJECTION | |
| DRAWING A3-SIZE | SHEET NUMBER 1/1 |